IM R 15



Benefits

- ✓ Hydraulically adjustable tracks width: more stability and traction to move around the building site or rough terrain
- ✓ Removable wired control panel for remote control of the platform during translation
- ✓ Contemporary and proportional electrohydraulic controls: efficiency and safety for operators
- ✓ Slewing 360° (not continuous): outstanding aerial accessibility in any work situation
- ✓ Basket rotation ± 75°: complete placement on working site in any condition
- ✓ Compact size, with limited overall outrigger footprint
- ✓ Engine guarded for safety and working protection
- ✓ Aluminium platform 1.40x0.70x1.10 mts.
- ✓ Innovative design with fully enclosed structure

Standard equipment

12 V emergency electro-pump
Non-marking rubber tracks
Oversized outrigger pads (ø 350 mm)

Double speed traction kitWorking light in the platform

Emergency hand pump		
Cylinder holding valve		
Hour meter		
Momentum device		
Load cell		
Hydraulic Jib		
Rubber tracks		
Hydraulically adjustable tracks width		
230V - 16 A electro-pump for indoor use		
Air / Water outlet in the platform		
230V - 16 A outlet in the platform		
Removable wired control box		
Optionals		
Wireless radio-control box		
Automatic levelling outriggers		

Working height	m	15
Platform height	m	13
Side outreach	m/kg	8.70 / 80 - 7.80 / 120 - 6.70 / 200
Slewing	(°)	360° (not continuous)
Basket dimensions	m	1.40 x 0.70 x 1.10
Transport length	m	4.86 / 4.21 (without basket)
Transport width	m	Min 0.79 / Max 1.06
Height in stowed position	m	Min 1.99 / Max 2.10 (with stablizers in position)
Overall outrigger footprint	m	2,910 x 2,980
Driving speed	km/h	0 – 2
Gradeability	(°)	25°
Platform capacity	kg	200
Petrol engine	•	Honda GX390 - 11 HP 3600 rpm
Diesel engine		Yanmar L100N - 9.9 HP 3600 rpm
Total weight of the machine	kg	1980



Rotating turret hosting hydraulic components of the platform's aerial section





Engine guard enable high accessibility and impact's protection



Emergency hand pump with ease of access and operation.



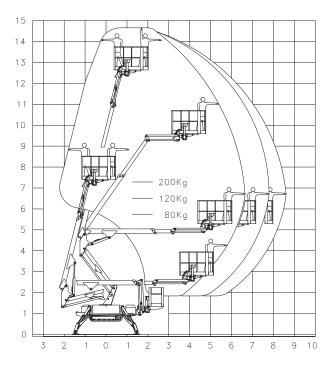



100

